


# Cobra® 40-10 5L Hopper Spray Pack



Cobra® is a high-pressure double diaphragm pump suitable for Airless and AirCoat applications up to 250 bar/3,625 psi. Cobra® is the first high-pressure pneumatic pump without packings. The absence of friction in the fluid section and the minimum shear make it perfect for any kind of material including the most critical ones such as reactive paints (UV paints, isocyanate's, acrylics) or highly abrasive materials. The pump works with extremely low pulsation and creates a uniform paint flow, achieving a perfect spray pattern and superb surface quality.



**GM 4700AC Cobra 40-10 Hopper 5L Spray Pack**  
 Part # 2342248

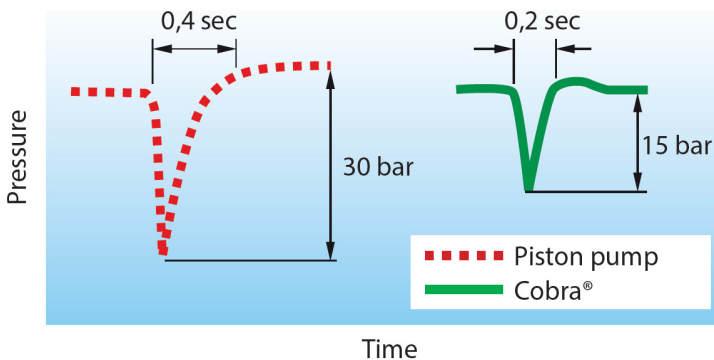


## No Application Limits

- Cobra® is friction free and can handle all critical materials.
- Minimized shearing effect.
- Reduced pulsation to ensure a consistent flow of material and a finer finish.
- Cobra® pumps have high speed operation and very small fluid chambers.

The fluid section minimizes material travel distance and lowers operating costs of the Cobra® to ensure enormous saving benefits!

- Reduced solvent consumption: up to 60% savings during flushing procedures.
- Less paint waste.
- Easy and fast color changes.
- Lower maintenance due to extremely low wear.

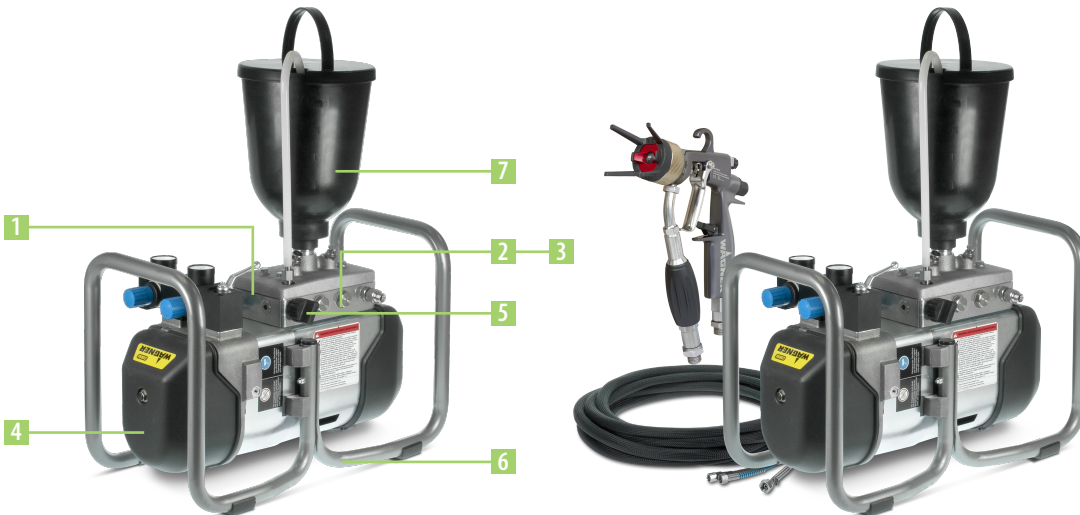

### WAGNER Cobra® Innovative Technology

WAGNER Cobra® is the only high-pressure pneumatic diaphragm pump on the market. The pump was specifically designed to ensure the highest reliability and the best performance.

- 1** Small fluid section and easy-to-clean design.
- 2** High reliability and low maintenance costs: special long-life diaphragms and tungsten carbide inlet valves.
- 3** Better finishing results: very low pulsation for consistent fluid output.
- 4** No ice problems: proven WAGNER IceBreaker® air motor technology. Excellent reliability and minimal ice formation, even at the highest operating speeds.
- 5** Easy operation: integrated recycle valve.
- 6** Versatile: all Cobra® pumps can work in either a horizontal or vertical position.
- 7** A variety of suction systems can be mounted: hopper, flexible suction hose, rigid suction pipe.

Cobra® 40-10 Technical Data	
	Cobra® 40:1
Pressure Ratio	40 : 1
Max. Fluid Pressure	250 bar/3,625 psi
Volume per DS	10 cc/.34 fl. oz.
Max. Pump Speed	200 DS/min
Max. Flow Rate	2.0 l/min - 0.53 gal/min
Weight	19 kg/42 lb.
Fluid Outlet	3/8" NPS

### Included:

- GM 4700AC (#2313585)
- Air Cap LV (#2313494)
- Nozzle ACF 3000 (#379411)
- Cobra 40-10 w/Stand (#2329521)
- Hopper 5L (#2344505)
- Hose (#2309706)
- AirCoat Regulator (#2328611)
- Fitting (#2332621)



**S & S Finishing Systems**  
62 McBrine Place, Unit #12  
Kitchener, ON Canada  
N2R 1H3  
T 519.893.1161  
sales@ssfinishingystems.ca  
ssfinishingystems.ca

### Wagner Industrial Solutions

**Powder Division**  
1770 Fernbrook Lane  
Plymouth, MN 55447  
T 800.473.2524  
F 630.503.2377

**Liquid Division**  
337 South Arthur Ave  
Louisville, CO 80027  
T 888.820.4498  
F 303.438.5708

www.wagnersystemsinc.com