

Excellent coatings firmly under control

WAGNER PROTEC GM 1, the new airless manual gun

- Well equipped for heavy-duty protective coating
- Robust quality, powerful and long-lasting
- Reliable and low maintenance

Technical data	GM 1-530	GM 1-350
Trigger	4-finger	2-finger
Material pressure max.	530 bar	350 bar
Thread nozzle guard	7/8" - 14 UNF - 2A	7/8" - 14 UNF - 2A
Material connection	A - 1/4" NPS	A - 1/4" NPS
Material temperature max.	80 °C	80 °C
Weight	580 g	560 g
Noise level max.	85 dB(A)	85 dB(A)
Length	160 mm	160 mm
Height	188 mm	188 mm
Atex designation	Ex II 2G X	Ex II 2G X



J. Wagner GmbH
Industrial Solutions
D-88677 Markdorf
Tel +49 (0) 7544 505 - 0
Fax +49 (0) 7544 505 - 1200

J. Wagner AG
Industrial Solutions
CH-9450 Altstätten/SG
Tel +41 (0) 71 7572211
Fax +41 (0) 71 7572323



www.wagner-group.com




The new airless manual gun PROTEC GM 1

Powerful. Robust. Reliable.
Experience the difference!



Hard
working easy
handling!

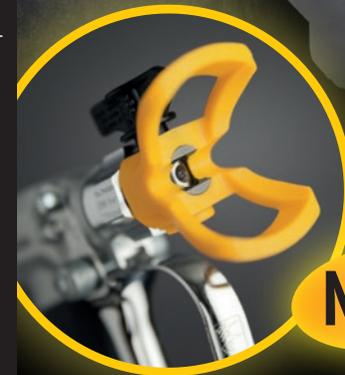

NEW

With ease to top results

Airless Manual Gun **WAGNER PROTEC GM 1** – Details that are more than convincing.



Low trigger pull

Noticeably low trigger and holding force even at the highest operating pressure.



Robust and dependable

Ready to use for the highest pressures and in the toughest working conditions.



High filtration efficiency

Fast and easy change of the WAGNER cage filter without tools for reliable operation and flawless surfaces.



WAGNER ProfiTIP nozzle

Excellent spraying properties. Easily adjustable nozzle guard. 180° rotation of the nozzle gets rid of blockages quickly and reliably.

ProfiTip nozzle guard


Free to rotate and dirt-resistant. With reversible nozzle.

Trigger

Smooth, depending on the model either 2- or 4-finger trigger.

Safety guard

Double function – it's also the tool for changing the cage filter.

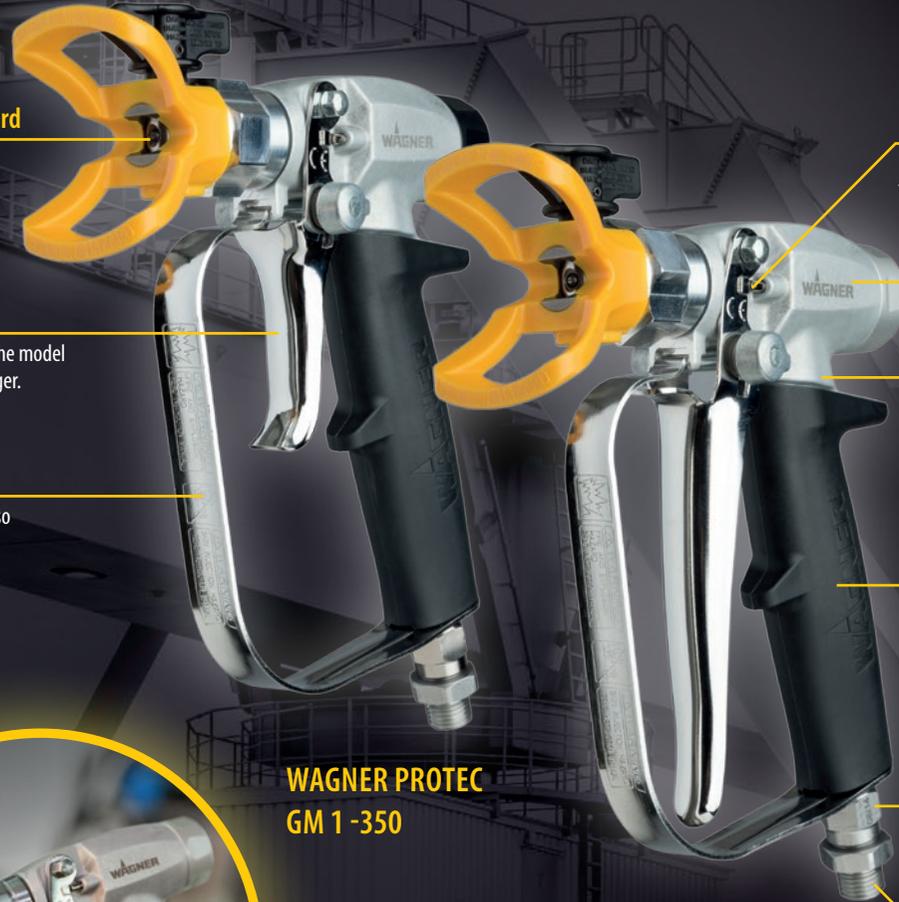

WAGNER PROTEC GM 1-350

WAGNER PROTEC GM 1-530

Extremely stable valve tappet

With additional guide and tungsten carbide inserts on the trigger.

Stable valve needle

Robust and durable.

Aluminum housing

Light but still extremely robust.

Ergonomic grip

Secure support in the crook of the thumb. Insulated, also suitable for heated material.

Cage-Filter

High filtering capacity. Simple and clean replacement.

Hose connection

With smooth swivel hose connection.